

P17233.P01

# UTILITY PATENT APPLICATION TRANSMITTAL

Attorney Docket No.

P17233

Total Pages

 Inventor(s) or Application Identifier  
 Hans PRINZING and Rainer BENTELE

 Title: PRESS DEVICE AND METHOD OF USING THE  
 SAME

Only for new nonprovisional applications under 37 CFR 1.53(b)

ADDRESS TO:

 Assistant Commissioner for Patents  
 Box Patent Application  
 Washington, DC 20231

## APPLICATION ELEMENTS

## ACCOMPANYING APPLICATION PARTS

1. ☒ Fee Transmittal Form  
(Submit an original, and a duplicate for fee processing)
2. ☒ Specification [Total Pages 24]  
(preferred arrangement set forth below)
  - Descriptive title of the Invention
  - Cross References to Related Applications
  - Statement Regarding Fed sponsored R & D
  - Reference to Microfiche Appendix
  - Background of the Invention
  - Brief Summary of the Invention
  - Brief Description of the Drawings (if filed)
  - Detailed Description
  - Claim(s)
  - Abstract of the Disclosure
3. ☒ Drawing(s) (35 USC 113) [Total Sheets 2]
4. ☒ Oath or Declaration [Total Pages 3]
  - a. ☒ Newly executed (original or copy) ☐ Unexecuted
  - b. ☐ Copy from a prior application (37 CFR 1.63(d))  
(for continuation/divisional with Box 18 completed)  
[Note Box 5 below]
    - i. ☐ **DELETION OF INVENTOR(S)**  
Signed statement attached deleting inventor(s)  
named in the prior application, see 37 CFR 1.63(d)(2)  
and 1.33(b).
5. ☐ Incorporation By Reference (useable if Box 4b is checked)  
The entire disclosure of the prior application, from which a copy  
of the oath or declaration is supplied under Box 4b, is considered  
as being part of the disclosure of the accompanying application  
and is hereby incorporated by reference therein.
6. ☐ Microfiche Computer Program (Appendix)
7. Nucleotide and/or Amino Acid Sequence Submission  
(if applicable, all necessary)
  - a. ☐ Computer Readable Copy
  - b. ☐ Paper Copy (identical to computer copy)
  - c. ☐ Statement verifying identity of above copies

8. ☒ Assignment Papers (cover sheet & document(s))
9. ☐ 37 CFR 3.73(b) Statement (when there is an assignee) ☐ Power of Attorney
10. ☐ English Translation Document (if applicable)
11. ☐ Information Disclosure Statement (IDS)/PTO-1449 ☐ Copies of IDS Citations
12. ☒ Preliminary Amendment
13. ☒ Return Receipt Postcard (MPEP 503)  
(Should be specifically itemized)
14. ☐ Small Entity Statement(s) ☐ Statement filed in prior application,  
Status still proper and desired
15. ☐ The prior application is assigned of record to \_\_\_\_\_
16. ☒ Foreign priority claimed
  - a. ☒ Claim of Priority
  - b. ☒ Certified Copy of Priority Document(s)
17. ☐ Other: \_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

18. If a **CONTINUING APPLICATION**, check appropriate box and supply the requisite information:
☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior Application No. \_\_\_\_\_/\_\_\_\_\_, filed \_\_\_\_\_.
19. ☐ Amend the specification by inserting before the first line the sentence:

This application is a \_\_\_ continuation-in-part, \_\_\_ continuation, \_\_\_ division, of Application No. \_\_\_\_\_/\_\_\_\_\_, filed \_\_\_\_\_.

Address all future correspondence to **Customer No. 7055** at the present address of:
 GREENBLUM & BERNSTEIN, P.L.C.  
 1941 Roland Clarke Place  
 Reston, VA 20191  
 (703) 716-1191

1/12/99  
 Date


 Signature

 Neil F. Greenblum, Reg No. 28,394  
 Typed or Printed Name

P17233.A01

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicant : H. PRINZING et al.

Serial No : Not Yet Assigned

Filed : Concurrently Herewith

For : PRESS DEVICE AND METHOD OF USING THE SAME

**PRELIMINARY AMENDMENT**

Commissioner of Patents and Trademarks  
Washington, D.C. 20231

Sir:

Prior to the examination of the above-identified patent application, the Examiner is respectfully requested to amend the specification and claims as follows:

IN THE SPECIFICATION

Please amend the specification to ensure that "wider" appears as ---further---, as follows:

Page 17, line 9, "wider" should be ---further---.

REMARKS


The Examiner is respectfully requested to enter the foregoing amendment prior to examination and calculation of the filing fees in the above-identified patent application.

In particular, the change to the specification made herein is already present in the specification as filed, but is also being made herein to ensure that the specification even more clearly denotes that ---further--- replaces "wider".

P17233.A01

Should there be any questions, the Examiner is invited to contact the undersigned at the below listed number.

Respectfully submitted,  
H. PRINZING et al.

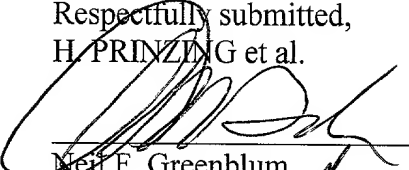  
Neil F. Greenblum  
Reg. No. 28,394

*Reg No 33,094*

January 12, 1999  
GREENBLUM & BERNSTEIN, P.L.C.  
1941 Roland Clarke Place  
Reston, VA 20191  
(703) 716-1191

11.JAN.1999 14:25  
DEC.18.1998 6:09PM

VSPT VSH ABT.PJ DR.LINDEN  
GREENBLUM & BERNSTEIN  
GREENBLUM&BERNSTEIN

NR.094 S.2/34  
NO.080 P.7

PA10671 US

TITLE OF THE INVENTION

**PRESS DEVICE AND METHOD OF USING THE SAME**

INVENTORS

**Rainer BENTELE, Hans PRINZING**

P17233.S02

P17233.S02

## **Press Device And Method Of Using The Same**

### **CROSS-REFERENCE TO RELATED APPLICATIONS**

The present application claims priority under 35 U.S.C. § 119 of German Parent Application No. 198 00 807.4, filed January 12, 1998, the disclosure of which is expressly incorporated by reference herein in its entirety.

### **BACKGROUND OF THE INVENTION**

#### **1. Field of the Invention**

The present invention relates to a press device and method of using the same for treating a fibrous material web, and more specifically to a press device with variably adjustable pressure and line force.

#### **2. Discussion of Background Information**

The present invention relates to press device and method of using the same for treating a fibrous material web, in particular a paper and/or cardboard web. A press device has a press nip that is elongated in the web travel direction, and is formed between a shoe press unit and a counter roll. The press device also has a roll nip that is formed between the counter roll and another roll. The shoe press unit includes a flexible press belt, which revolves around a non-rotating carrier and, in the region of the elongated press nip, is supported on the carrier by at least one support element. The counter roll is embodied as a deflection compensation roll with a roll jacket, which revolves around a non-rotating carrier and, in the region of the elongated press nip, is in turn supported on the relevant carrier by at least one support element. Preferably the pressure fluid-actuated support elements are designed, and can be actuated, in such a way that a pressure differential is produced with regard to the internal pressures, which are generated by means of the support elements, and act on the flexible press belt of the shoe press unit or act on the roll jacket of the counter roll.

P17233.S02

With a press device of this kind in which the shoe press is usually disposed on top, a line force that is as even as possible should be generated even in the roll nip that is not deflection-controlled, which is achieved by means of a corresponding pressure differential or a corresponding line force differential between the shoe press unit and the counter roll. The pressure differential brings about the fact that the line force acting in the elongated press nip formed between the shoe press unit and the counter roll is not compensated for to the full extent by means of the internal support elements of the counter roll. The remaining force causes a deformation of the counter roll both in the elongated press nip formed by the shoe press unit, which can be easily compensated for by the flexible support element of the shoe press unit, and in the roll nip formed between the counter roll and the other roll. If the pressure differential is selected, for example, so that a greater pressure occurs in the shoe press unit than in the counter roll, ~~then a flattening of the counter roll occurs in the roll nip formed between the counter roll and the other roll.~~ Due to this <sup>bulging</sup> ~~flattening~~, the counter roll and the other roll can, for example, be embodied with a <sup>reduced</sup> ~~slight~~ cambering for the deflection compensation. With a slighter cambering of this kind, the speed differentials between the roll center and the roll ends can be kept small. In particular, such a line force differential can consequently be produced between the shoe press unit and the counter roll, which produces a deflection of the counter roll in the roll nip and as a result, permits a reduction of the required cambering in this roll nip.

DE-A-195 20 443.3 discloses a press device where the pressure differential or the line force differential is fixed at a constant value. However, a fixed pressure differential, just as the lack of a pressure differential, brings with it the disadvantage that the line force can only be adjusted, at most, in a very limited range. This can in particular be traced to the fact that the deformations, that are a function of the line force, can no longer be correctly compensated for by means of the fixed camberings provided and this consequently leads to deviations of the pressure profile occurring over the web width.

\* then a deflection of the counter roll occurs in form of a bulging towards the other roll in the roll nip formed ....

P17233.S02

It is also known to have a central roll that has an additional series of support elements which are provided in the direction of the roll nip toward the preceding roll, and regulates the deflection compensation in this roll nip. However, this presents a problem in that such an additional series of support elements is connected with considerable additional expenditures, and is correspondingly costly.

### SUMMARY OF THE INVENTION

Accordingly, the present invention is directed to a method and apparatus for a press device that substantially obviates one or more of the problems arising from the limitations and disadvantages of the related art.

It is an object of the present invention to provide a press device that is reasonably priced and simple in design, in which the line force in the roll nip is adjustable in a relatively wide range.

It is another object of the present invention to provide a press device where the pressure profile that is produced in the roll nip lateral to the web travel direction can be varied without requiring an additional series of support elements of the counter roll for this purpose.

Accordingly, one aspect of the present invention is directed to a press device for treating a fibrous material web that includes: a shoe press unit, the shoe press unit includes a flexible press belt that revolves around a non-rotating carrier; a counter roll including a deflection compensation roll with a roll jacket revolving around a second non-rotating carrier; a third roll; a roll nip formed between the counter roll and the third roll; a press nip elongated in a web travel direction, and formed between the shoe press unit and the counter roll; at least one first support element, the flexible press belt supported on the non-rotating carrier by the at least one first support element in the region of the elongated press nip; and at least one second support element, the roll jacket supported on the second non-rotating carrier by the at least one second support element

P17233.S02

in the region of the elongated press nip, wherein a changeable pressure differential occurs between internal pressures generated by the at least one first support element acting on the flexible press belt of the shoe press unit, and the at least one second support element acting on the roll jacket of the counter roll.

5 According to another aspect of the present invention, the at least one first support element is pressure fluid-actuated.

According to yet another aspect of the present invention, the at least one second support element is pressure fluid-actuated.

10 According to a further aspect of the present invention, the fibrous material web comprises at least one of a paper web or a cardboard web.

According to another aspect of the present invention, a line force differential between the shoe press unit and the counter roll is changeable with the pressure differential.

15 According to yet another aspect of the present invention, a cross-section of the pressure differential is produced lateral to the web travel direction, the cross-section of the pressure differential is changeable so different pressure differentials are adjustable over the width.

According to a further aspect of the present invention, the line force in the roll nip is changeable by way of the pressure differential.

20 According to another aspect of the present invention, line forces that are at least essentially even are adjusted in the roll nip by way of the variable pressure differential.

According to yet another aspect of the present invention, the pressure differential or the line force differential is continuously changeable in areas.

25 According to a further aspect of the present invention, the internal pressure produced by the at least one first support element is changeable to change the pressure differential.



P17233.S02

According to another aspect of the present invention, the internal pressure produced by the at least one second support element is changeable to change the pressure differential.

5 According to yet another aspect of the present invention, both the internal pressure produced by the at least one first support element and the internal pressure produced by the at least one second support element is changeable to change the pressure differential.

10 According to a further aspect of the present invention, the at least one first support element and the at least one second support element are connected to a common pressure fluid line, an adjustable pressure reduction device is provided in the pressure fluid connection between the common pressure fluid line and the at least one first support element or the pressure fluid connection between the common pressure fluid line and the at least one second support element, the pressure differential is changeable by the adjustable pressure reduction device.

15 According to another aspect of the present invention, at least one of the at least one first support element and the at least one second support element is connected to the common pressure fluid line individually, in groups, or all together.

20 According to yet another aspect of the present invention, the adjustable pressure reduction device is provided between at least one of the groups of the at least one second support element and the common pressure fluid line, thereby reducing the pressure of the at least one second support element connected to the common pressure fluid line in groups.

25 According to a further aspect of the present invention, the adjustable pressure reduction device is provided between at least one individual at least one second support element and the common pressure fluid line, thereby reducing the pressure of the at least one second support element individually connected to the common pressure fluid line.

P17233.S02

According to another aspect of the present invention, the adjustable pressure reduction device includes at least one variably adjustable valve.

According to yet another aspect of the present invention, the pressure differential and/or the line force differential are externally adjustable.

5 According to a further aspect of the present invention, the pressure differential and/or the line force differential are adjustable mechanically, hydraulically, pneumatically, manually, by remote control, at the site, from a control position, or in a process-guided manner.

10 According to another aspect of the present invention, the pressure differential is adjustable as a function of a line force in the roll nip by predeterminable characteristic curves.

15 According to yet another aspect of the present invention, the pressure differential is adjustable as a function of line force correction procedures for the roll nip, wherein the line force correction procedures may be at least one of input by way of an electronic control and produced by way of corresponding signals of a process guidance system.

According to a further aspect of the present invention, the pressure differential is adjustable by way of a regulating system that includes at least one closed regulation loop.

20 According to another aspect of the present invention, a line force in a second roll nip formed between the third roll and a fourth roll, is changeable by way of the pressure differential.

According to yet another aspect of the present invention, the counter roll and/or the third roll are cambered.

25 According to a further aspect of the present invention, the third roll, the fourth roll, and the counter roll are cambered.

P17233.S02

According to another aspect of the present invention, the shoe press unit includes a shoe press roll and the flexible press belt, the flexible press belt being a flexible press jacket.

5 According to another aspect of the present invention, the shoe press unit is disposed above the counter roll.

According to yet another aspect of the present invention, the ends of the roll jacket of the counter roll are supported on the relevant carrier so that the roll jacket cannot move radially.

10 According to a further aspect of the present invention, an action plane of the at least one second support element of the counter roll inclined slightly in relation to a second action plane of the at least one first support element of the shoe press unit, wherein an inclination angle preferably lies in a range from about  $2^\circ$  to  $15^\circ$ .

According to another aspect of the present invention, an inclination angle in particular lies in a range from about  $4^\circ$  to  $8^\circ$ .

15 According to another aspect of the present invention, an action plane of the at least one second support element of the counter roll coincides, at least essentially, with a second action plane of the at least one first support element of the shoe press unit.

20 According to yet another aspect of the present invention, pressure-active surfaces of the at least one second support element are not equal to second pressure-active surfaces of the at least one first support element of the shoe press unit.

25 According to a further aspect of the present invention, the invention includes a method of treating a fibrous material with a press device capable of variably adjustable pressure and variably adjustable line force that includes: forming a press nip between a shoe press unit and a counter roll, the press nip elongated in a web travel direction; supporting a flexible press belt, that revolves around a non-rotating carrier, on at least one first support unit, the flexible press belt supported in the region of the elongated press nip; forming a roll nip between the counter roll and a third roll; supporting a roll

P17233.S02

jacket, that revolves around a second non-rotating carrier, on at least one second support unit, the roll jacket supported in the region of the elongated press nip; supplying a fluid to the at least one first support unit and the at least one second support unit; adjusting a pressure differential between internal pressures generated by the at least one first support element acting on the flexible press belt, and the at least one second support element acting on the roll jacket; the pressure differential adjusted by adjusting of the pressure of the fluid supplied to the at least one first support unit and the at least one second support unit

Other exemplary embodiments and advantages of the present invention may be ascertained by reviewing the present disclosure and the accompanying drawings.

### BRIEF DESCRIPTION OF THE DRAWINGS

The present invention is further described in the detailed description which follows, in reference to the noted plurality of drawings by way of non-limiting examples of preferred embodiments of the present invention, in which like reference numerals represent similar parts throughout the several views of the drawings, and wherein:

Fig. 1 is a schematic cross-sectional representation of an exemplary embodiment of a press device with three press rolls according to the present invention;

Fig. 2 is a schematic longitudinal representation of the exemplary embodiment shown in Fig. 1 in which the pressure fluid connections that are routed to the support elements are also shown; and

Fig. 3 is a schematic cross-sectional representation of another exemplary embodiment of a press device with four press rolls according to the present invention.

### DETAILED DESCRIPTION OF THE PRESENT INVENTION

The particulars shown herein are by way of example and for purposes of illustrative discussion of the embodiments of the present invention only and are presented in the cause of providing what is believed to be the most useful and readily understood

P17233.S02

description of the principles and conceptual aspects of the present invention. In this regard, no attempt is made to show structural details of the present invention in more detail than is necessary for the fundamental understanding of the present invention, the description taken with the drawings making apparent to those skilled in the art how the several forms of the present invention may be embodied in practice.

In the press device according to the present invention, the pressure differential may be changed. As a result, preferably the line force differential between the shoe press unit and the counter roll may also be changed with the pressure differential.

A variably adjustable pressure differential between the shoe press unit and the counter roll, in particular, allows a deformation in the roll nip formed between the counter roll and the other roll to be variable. As a result, in this otherwise not deflection-controlled roll nip, line forces can be adjusted over a wide range, wherein an optimal pressure cross-section is also always assured.

Another advantage of the variably changeable pressure differential between the shoe press unit and the counter roll is that with an intentional adjustment of the pressure differential, cross-section corrections can be carried out in the roll nip formed between the counter roll and another roll. As a result, the moisture cross-section may consequently also be adjusted in the desired manner after the press. With a change of the pressure differential or the line force differential between the shoe press unit and the counter roll, the deflection of the counter roll in the roll nip also changes and, as a result, so does the pressure distribution being produced in the roll nip. In this connection, the press distribution changes only in the roll nip. A deflection change of the counter roll in the elongated press nip is compensated for by the flexible press shoe. As a result, it is possible to keep the line forces that act on the fibrous material web in at least one roll nip unchanged at the respectively adjusted desired value. Even with a change of the line forces in the neighboring press nips, an optimal, even line force can always be achieved in the roll nip formed between the counter roll and the other roll.

P17233.S02

In order to improve the moisture cross-section in the roll nip formed between the counter roll and the other roll, corrections of the line force are possible in the form of edge reliefs or edge loadings. In addition, the replacement of the other roll, that forms the roll nip with the counter roll, by a different roll with a different rigidity is simplified wherein the different rigidity can, for example, be due to the material, the wall thickness, or in the case of a suction roll, the bore pattern. Furthermore, a simpler adaptation to another magnitude of deformation in the roll nip is produced, which can be caused, for example, by a changed vacuum in the other roll. As a result, the previously possible cambering change of the counter roll and the other roll by a corresponding change of the pressure differential between the shoe press unit and the counter roll can be avoided.

In a press device according to the present invention, it is particularly advantageous if the pressure differential, or the line force differential, can be changed continuously, at least in areas. In order to change the pressure differential, for example, the internal pressure, that is produced by the support elements of the shoe press unit and acts on its flexible press belt, may be changed. The pressure differential may be changed also, for example, if the internal pressure, that is produced by the support elements of the counter roll and acts on its roll jacket, can also be changed. It is also possible that to change the pressure differential, both the internal pressure, that is produced by the support elements of the shoe press unit and acts on its flexible press belt, and the internal pressure, that is produced by the support elements of the counter roll and acts on its roll jacket, may be changed.

In an aspect of the press device according to the present invention, the support elements of the shoe press unit and the support elements of the counter roll are connected to a common pressure fluid line. Adjustable pressure reduction devices are provided in the pressure fluid connection between the common pressure fluid line and the support element(s) of the shoe press unit, and/or in the pressure fluid connection between the common pressure fluid line and the support element(s) of the counter roll. The pressure differential can be changed by way of these variable pressure reduction devices.

P17233.S02

The support elements of the shoe press unit and/or the support elements of the counter roll can be connected to the common pressure fluid line individually, in groups, or all together. In order to reduce the pressure of support elements connected to the common pressure fluid line in groups, an adjustable pressure reduction device may be provided between at least one, preferably each, of these groups of support elements and the common pressure fluid line. In order to reduce the pressure of support elements individually connected to the common pressure fluid line, an adjustable pressure reduction device may be provided between at least one, preferably each, of these individual support elements and the common pressure fluid line.

In another aspect of a press device according to the present invention, the pressure reduction device includes at least one variably adjustable valve.

In most instances, it is suitable if the pressure differential or the line force differential may be adjusted from the outside. The pressure differential or the line force differential may be adjusted, for example, mechanically, hydraulically, pneumatically, manually, by remote control, at the site, from a control position, and/or in a process-guided manner, as is conventional.

In another aspect of a press device according to the present invention, the pressure differential may be adjusted as a function of the line force in the roll nip by using characteristic curves that may be predetermined, as is conventional. The pressure differential may also be adjusted as a function of line force correction procedures for the roll nip. The line force correction procedures may preferably be input by way of an electronic control and/or may be produced by way of corresponding signals of a process guidance system. The pressure differential may in particular also be adjusted by way of a regulating system that includes at least one closed regulation loop.

In another aspect of a press device according to the present invention, the line force in another roll nip, which is formed between the other roll and an additional roll, may be changed by way of the pressure differential. The additional roll may for example be a suction roll.

P17233.S02

At least the counter roll and/or the other roll that forms the roll nip together with the counter roll may be suitably cambered. Due to the changeable pressure differential, or the changeable line force differential, a cambering of this kind may be more slight than normal. In some cases, a cambering of this kind may also be completely eliminated.

5 In another aspect of a press device according to the present invention, the shoe press unit is formed by a shoe press roll with a flexible press jacket as a press belt. The shoe press unit is suitably disposed above the counter roll.

10 In another aspect of a press device according to the present invention, the roll jacket of the counter roll is supported on its ends so that it cannot move radially on the relevant carrier.

15 In certain instances, it may be useful if the action plane of the at least one support element of the counter roll is inclined slightly in relation to the action plane of the at least one support element of the shoe press unit. It may also be possible that the action plane of the at least one support element of the counter roll coincides, at least essentially, with the action plane of the at least one support element of the shoe press unit.

20 In another aspect of a press device according to the present invention, the pressure-active surfaces of the support elements of the counter roll are not equal to the pressure-active surfaces of the at least one support element of the shoe press unit. An action that is similar to that of the support elements of the counter roll which are inclined out of the action plane of the elongated press nip may also be correspondingly produced by virtue of the fact that the pressure-active surfaces of these support elements may not be equal to the surfaces of the support elements of the shoe press unit. A line force differential between the two rolls is already achieved upon connection to a common pressure line, by the different internal pressure surfaces. In addition, variable pressure reduction devices may now be inserted into one or both supply lines in order to achieve the advantages mentioned above.

25 Figs. 1 and 2 show a schematic representation of a first exemplary embodiment of a press device according to the present invention which may be used for treating a



P17233.S02

fibrous material web 10, in particular a paper and/or cardboard web. This press device has a press nip 16 that is elongated in the web travel direction L and is formed between a shoe press unit - a shoe press roll 12 in this instance - and a counter roll 14, and has a roll nip 20 that is formed between the counter roll 14 and another roll - a suction roll 18 in this instance.

The shoe press roll 12, disposed directly above the counter roll 14, has a flexible press jacket 26, which is used as a press belt. Shoe press roll 12 revolves around a non-rotating carrier 22, and is supported against carrier 22 in the region of the elongated press nip 16 by a support element 24.

Counter roll 14, in this instance, may be embodied as a deflection compensation roll. Counter roll 14 has a roll jacket 30, which revolves around a non-rotating carrier 28 and is supported on carrier 28 in the region of the elongated press nip 16 by a series of support elements 32 that extend lateral to the web travel direction L. As shown in Fig. 1, suction roll 18 may be disposed obliquely beneath counter roll 14. The rolls 12, 14, and 18 are supported in a seating that is not shown. In addition to the fibrous material web 10, drainage felts 34 travel through the press nips 16 and 20 in order to absorb water expressed from the fibrous material web 10.

The hydraulic support element 24 of the shoe press roll 12, which is in the form of an axially extending strip supported on the carrier 22, may be provided with a concave support surface 36 in the current instance. Instead of a strip supported on a hydraulic pressure cushion, a number of support elements 24 may also be used. The lubrication of the gap between the support face 36 and the inner surface of the flexible press jacket 26 may take place in a hydrostatic and/or hydrodynamic manner.

The press nip 16 that is elongated in the web travel direction L may be formed by the concave support surface 36 and the approximately cylindrical counter roll 14.

On its ends, roll jacket 30 of counter roll 14 may be supported on carrier 28 so that it cannot be moved radially.

P17233.S02

In this exemplary embodiment of a press device according to the present invention, the action plane 38 of support elements 32 of counter roll 14 may be inclined slightly in relation to the plane 40 of support element 24 of shoe press roll 12. The inclination angle  $\alpha$  preferably lies in a range from about  $2^\circ$  to  $15^\circ$ , and in particular, in a range from about  $4^\circ$  to  $8^\circ$ . It may also be possible that action plane 38 of support elements 32 of counter roll 14 coincides, at least essentially, with action plane 40 of support element 24 of shoe press roll 12.

Since roll jacket 30 of counter roll 14 is fixed at the ends by way of bearings 42 on carrier 28, the deformation of roll jacket 30 of counter roll 14 that results from the inclination of support elements 32 (shown in Fig. 1) has a particularly strong effect in the central region so that roll jacket 30 there deforms more intensely toward suction roll 18.

In the present exemplary embodiment, support element 24 of shoe press roll 12 and support elements 32 of counter roll 14 are connected to a common pressure fluid line 44. The support elements 32, in Fig. 2, of counter roll 14 may be connected in groups to common pressure fluid line 44.

The pressure fluid-actuated support elements 24 and 32 may be acted on so that with regard to the internal pressures, (which are produced by these support elements 24, 32 and act on the flexible press jacket 26 of shoe press roll 12 or roll jacket 30 of counter roll 14), a pressure differential occurs that may also be determined in part by a different size of the pressing surfaces of the support elements 24, 32. According to the present invention, this pressure differential may be changed. In particular, the line force differential between shoe press roll 12 and counter roll 14 may also be changed with this pressure differential. Preferably, the cross-section of the pressure differential between shoe press roll 12 and counter roll 14, which cross-section is produced lateral to the web travel direction L, may be changed so that, in particular, different pressure differentials may be adjusted over the width. By way of the variable pressure differential between shoe press unit 12 and counter roll 14, the line force in roll nip 20 may consequently also be changed, wherein line forces may be adjusted in roll nip 20 that may be at least

P17233.S02

substantially even. The pressure differential or the line force differential may be changed continuously, at least in areas. The pressure differential or the line force differential may be adjusted externally in the current instance. The adjustment may be carried out, for example, mechanically, hydraulically, pneumatically, manually, by remote control, at the  
5 site, from a control position, and/or in a process-guided manner, as is conventional. The pressure differential may, for example, be adjusted as a function of the line force in roll nip 20 by characteristic curves that may be predetermined, as is conventional. It may in particular also be adjusted as a function of line force correction procedures for roll nip 20. In this embodiment of a press device according to the present invention, the  
10 adjustment takes place by way of an electronic control 62. It is in particular also possible that, for example, the respective line force correction procedures and/or the like may be produced by way of corresponding signals of a process guidance system. In addition, the pressure differential may be adjusted by way of a regulating system that includes at least one closed regulation loop.

15 In the present exemplary embodiment of a press device according to the present invention, the internal pressure, which is produced by support elements 32 of the counter roll 14 and acts on its roll jacket 30, may be changed in order to change the pressure differential (see Fig. 2). In this embodiment, adjustable or variably adjustable pressure reduction devices 46 are provided in the pressure fluid connection between the common  
20 pressure fluid line 44 and support elements 32 of counter roll 14, wherein the pressure differential may be changed by way of these variable pressure reduction devices 46. In order to reduce the pressure of support elements 32 that are connected in groups to the common pressure fluid line 44, an adjustable or variably adjustable pressure reduction device 46 may be respectively provided between each group of support elements 32 and  
25 the common pressure fluid line 44. In contrast to this, support element 24 of shoe press roll 12 may be directly connected to the common pressure fluid line 44. The pressure reduction device 46 may, for example, respectively include a variably adjustable valve.

P17233.S02

The deformation in roll nip 20 formed between counter roll 14 and suction roll 18 may also be variably influenced by the variably adjustable pressure differential between shoe press roll 12 and counter roll 14. As a result, in this otherwise not deflection-controlled roll nip 20, line forces may be adjusted over a wide range, wherein an optimal pressure cross-section is also always assured. With an intentional adjustment of the variable pressure differential between shoe press roll 12 and counter roll 14, cross-section corrections may be carried out in roll nip 20 formed between counter roll 14 and suction roll 18.

Due to the pressure differential that may be changed according to the present invention, though, this cambering of the rolls can be kept relatively slight. In certain instances, such a cambering may even be entirely eliminated.

In the exemplary press device according to the present invention shown in Fig. 2, a higher pressure may be produced in shoe press roll 12 than in counter roll 8. In order to influence the cross-section in the preceding roll nip 20, however, the reverse instance may also be suitable, in which a higher pressure is exerted on roll jacket 30 of counter roll 14 than on press jacket 26 of shoe press roll 12. In this embodiment, the pressure reduction devices 46 may be inserted between the common pressure fluid line 44 and a desired number of support elements or support element groups of shoe press roll 12. The reduced pressure, however, may always continue to have such a value that the desired line force is produced in the elongated press nip 16 formed between shoe press roll 12 and counter roll 14. The roll nip 20 is now influenced in the opposite fashion. In this instance, namely, an increase in the overall deformation occurs. This may be of use, particularly in relatively narrow paper making machines, where the purpose of the cambering reduction plays a subordinate role in roll nip 20 formed between counter roll 14 and the other roll 18.

An even higher measure of variability may be achieved if variably adjustable pressure reduction devices 46 are inserted both in the pressure fluid connections to shoe press roll 12 and in the pressure fluid connections to counter roll 14. The line forces in

P17233.S02

roll nip 20 may then be adjusted in an even wider line force range, wherein an even pressure cross-section in roll nip 20 may always be produced. Then edge corrections of the line force in roll nip 20 may be carried out in the positive direction (edge over-pressing) and in the negative direction (edge relief), for example, by way of correction procedures.

Fig. 3 shows a schematic cross-sectional representation of an exemplary embodiment of a press device with four press rolls. This embodiment differs from the one shown in Figs. 1 and 2 essentially by the fact that before roll nip 20 in terms of the web travel direction L, a wider roll nip 48 may be provided, which is formed between suction roll 18 and an additional roll 50 disposed underneath it. This additional roll nip 48 may be double-felted, while the two press nips 20 and 16 following it in the web travel direction L respectively may have single felts. The upper felt 52, which is guided through the additional roll nip 48 also travels through roll nip 20. The additional roll 50 may be disposed inside the loop of the lower felt 54 guided through roll nip 48. The fibrous material web 10 may be taken over from the upper felt 52 by a wire belt 58 in the region of a suction roll 56 before being guided through roll nip 48. Otherwise, this exemplary embodiment essentially has the same design as that according to Figs. 1 and 2, wherein parts that correspond to one another are provided with the same reference numerals.

Consequently, a pressure differential or a line pressure differential 60 may again be generated between shoe press roll 12 and counter roll 14, wherein the pressure differential or the line pressure differential 60 may again be changed and preferably may be adjusted in a variable and smooth manner. In the current embodiment, the line force in the other roll nip 48 may in particular also be changed by way of the variable pressure differential or the variable line pressure differential 60 between shoe press roll 12 and counter roll 14. As a result, this pressure differential or this line pressure differential 60 between shoe press roll 12 and counter roll 14 may in particular be adjusted in a variable and smooth manner. As a result, the deflection of the central or counter roll 14 also

P17233.S02

changes again in roll nip 20 and consequently the press distribution in this roll nip 20 can also change. It is therefore possible to keep the line forces acting on the fibrous material web 10 in the roll nip 20 and the elongated press nip 16 at the respectively desired value. The adjustment of the line pressure differential 60 or the pressure differential also may occur in the current exemplary embodiment, again by way of an electronic control 62. The adjustment may be carried out, for example, mechanically, hydraulically, pneumatically, manually, by remote control, at the site, from a control position, and/or in a process-guided manner, as is conventional. Here, too, a second series of support elements in the direction of roll nip 20 may be eliminated. The variable line force differential may in particular be used for influencing the press distribution in roll nip 20, without the respectively desired line forces in press nips 20, 16, and 48 from being changed in the process. In particular, the line force in roll nip 20 may be adjusted in a relatively wide range in the desired manner by way of the variable pressure differential or the variable line pressure differential. An intentional influence of the conditions in the other roll nip 48 may also be possible.

It is noted that the foregoing examples have been provided merely for the purpose of explanation and are in no way to be construed as limiting of the present invention. While the present invention has been described with reference to a preferred embodiment, it is understood that the words which have been used herein are words of description and illustration, rather than words of limitation. Changes may be made within the purview of the appended claims, as presently stated and as amended, without departing from the scope and spirit of the present invention in its aspects. Although the present invention has been described herein with reference to particular means, materials, and embodiments, the present invention is not intended to be limited to the particulars disclosed herein; rather, the present invention extends to all functionally equivalent structures, methods and uses, such as are within the scope of the appended claims.

P17233.S02

**WHAT IS CLAIMED IS:**

1. A press device for treating a fibrous material web comprising:  
a shoe press unit, said shoe press unit comprising a flexible press belt that  
revolves around a non-rotating carrier;  
5 a counter roll, said counter roll comprising a deflection compensation roll with  
a roll jacket revolving around a second non-rotating carrier;  
a third roll;  
a roll nip, said roll nip formed between said counter roll and said third roll;  
a press nip, said press nip elongated in a web travel direction, and formed  
10 between said shoe press unit and said counter roll;  
at least one first support element, the flexible press belt supported on the non-  
rotating carrier by said at least one first support element in the region of the elongated  
press nip; and  
at least one second support element, the roll jacket supported on the second non-  
15 rotating carrier by said at least one second support element in the region of the elongated  
press nip,  
wherein a changeable pressure differential occurs between internal pressures  
generated by the at least one first support element acting on the flexible press belt of the  
shoe press unit, and the at least one second support element acting on the roll jacket of  
20 the counter roll.
2. The press device according to claim 1, the at least one first support  
element being pressure fluid-actuated.
3. The press device according to claim 1, the at least one second support  
element being pressure fluid-actuated.
- 25 4. The press device according to claim 1, , the fibrous material web  
comprising at least one of a paper web and a cardboard web.
5. The press device according to claim 1, a line force differential between  
the shoe press unit and the counter roll being changeable with the pressure differential.

P17233.S02

6. The press device according to claim 1, a cross-section of the pressure differential being produced lateral to the web travel direction, the cross-section of the pressure differential being changeable so different pressure differentials are adjustable over the width.

5 7. The press device according to claim 5, the line force in the roll nip changeable by way of the pressure differential.

8. The press device according to claim 7, line forces that are at least essentially even being adjusted in the roll nip by way of the variable pressure differential.

9. The press device according to claim 5, one of the pressure differential and  
10 the line force differential being continuously changeable in areas.

10. The press device according to claim 1, the internal pressure produced by the at least one first support element being changeable to change the pressure differential.

11. The press device according to claim 1, the internal pressure produced by the at least one second support element being changeable to change the pressure  
15 differential.

12. The press device according to claim 1, both the internal pressure produced by the at least one first support element and the internal pressure produced by the at least one second support element being changeable to change the pressure differential.

13. The press device according to claim 1, the at least one first support  
20 element and the at least one second support element being connected to a common pressure fluid line, an adjustable pressure reduction device provided in at least one of the pressure fluid connection between the common pressure fluid line and the at least one first support element, and the pressure fluid connection between the common pressure fluid line and the at least one second support element, the pressure differential being  
25 changeable by the adjustable pressure reduction device.

14. The press device according to claim 13, at least one of the at least one first support element and the at least one second support element being connected to the common pressure fluid line one of individually, in groups, and all together.



P17233.S02

15. The press device according to claim 14, the adjustable pressure reduction device being provided between at least one of the groups of the at least one second support element and the common pressure fluid line, thereby reducing the pressure of the at least one second support element connected to the common pressure fluid line in groups.

16. The press device according to claim 14, the adjustable pressure reduction device being provided between at least one individual at least one second support element and the common pressure fluid line, thereby reducing the pressure of the at least one second support element individually connected to the common pressure fluid line.

17. The press device according to claim 13, the adjustable pressure reduction device including at least one variably adjustable valve.

18. The press device according to claim 5, at least one of the pressure differential and the line force differential being externally adjustable.

19. The press device according to claim 5, at least one of the pressure differential and the line force differential being adjustable by one of mechanically, hydraulically, pneumatically, manually, by remote control, at the site, from a control position, and in a process-guided manner.

20. The press device according to claim 1, the pressure differential being adjustable as a function of a line force in the roll nip by predeterminable characteristic curves.

21. The press device according to claim 1, the pressure differential being adjustable as a function of line force correction procedures for the roll nip, wherein the line force correction procedures may be at least one of input by way of an electronic control and produced by way of corresponding signals of a process guidance system.

22. The press device according to claim 1, the pressure differential being adjustable by way of a regulating system that includes at least one closed regulation loop.

P17233.S02

23. The press device according to claim 1, a line force in a second roll nip formed between the third roll and a fourth roll being changeable by way of the pressure differential.

24. The press device according to claim 1, at least one of the counter roll and the third roll being cambered.

25. The press device according to claim 23, the third roll, the fourth roll, and the counter roll being cambered.

26. The press device according to claim 1, the shoe press unit comprising a shoe press roll and the flexible press belt, the flexible press belt comprising a flexible press jacket.

27. The press device according to claim 1, the shoe press unit disposed above the counter roll.

28. The press device according to claim 1, the ends of the roll jacket of the counter roll being supported on the relevant carrier so that the roll jacket cannot move radially.

29. The press device according to claim 1, an action plane of the at least one second support element of the counter roll inclined slightly in relation to a second action plane of the at least one first support element of the shoe press unit, wherein an inclination angle lies in a range from about 2° to 15°.

30. The press device according to claim 29, the inclination angle lies in a range from about 4° to 8°.

31. The press device according to claim 1, an action plane of the at least one second support element of the counter roll coinciding, at least essentially, with a second action plane of the at least one first support element of the shoe press unit.

32. The press device according to claim 1, comprising pressure-active surfaces of the at least one second support element being not equal to second pressure-active surfaces of the at least one first support element of the shoe press unit.

P17233.S02

33. A method of treating a fibrous material with a press device capable of variably adjustable pressure and variably adjustable line force, said method comprising:

forming a press nip between a shoe press unit and a counter roll, the press nip elongated in a web travel direction;

5 supporting a flexible press belt, that revolves around a non-rotating carrier, on at least one first support unit, the flexible press belt supported in the region of the elongated press nip;

forming a roll nip between the counter roll and a third roll;

10 supporting a roll jacket, that revolves around a second non-rotating carrier, on at least one second support unit, the roll jacket supported in the region of the elongated press nip;

supplying a fluid to the at least one first support unit and the at least one second support unit;

15 adjusting a pressure differential between internal pressures generated by the at least one first support element acting on the flexible press belt, and the at least one second support element acting on the roll jacket; the pressure differential adjusted by adjusting of the pressure of the fluid supplied to the at least one first support unit and the at least one second support unit.

P17233.S02

ABSTRACT OF THE DISCLOSURE

5 Press device and method of using the same for treating a fibrous material web that includes a shoe press unit that includes a flexible press belt that revolves around a non-rotating carrier, a counter roll that includes a deflection compensation roll with a roll jacket revolving around a second non-rotating carrier, a third roll, a roll nip formed between the counter roll and the third roll, a press nip elongated in a web travel direction and formed between the shoe press unit and the counter roll, at least one first support element where the flexible press belt is supported on the non-rotating carrier by the at least one first support element in the region of the elongated press nip, at least one second support element where the roll jacket is supported on the second non-rotating carrier by the at least one second support element in the region of the elongated press nip. 10 A changeable pressure differential occurs between internal pressures generated by the at least one first support element acting on the flexible press belt of the shoe press unit, and the at least one second support element acting on the roll jacket of the counter roll.

112

FIG. 1



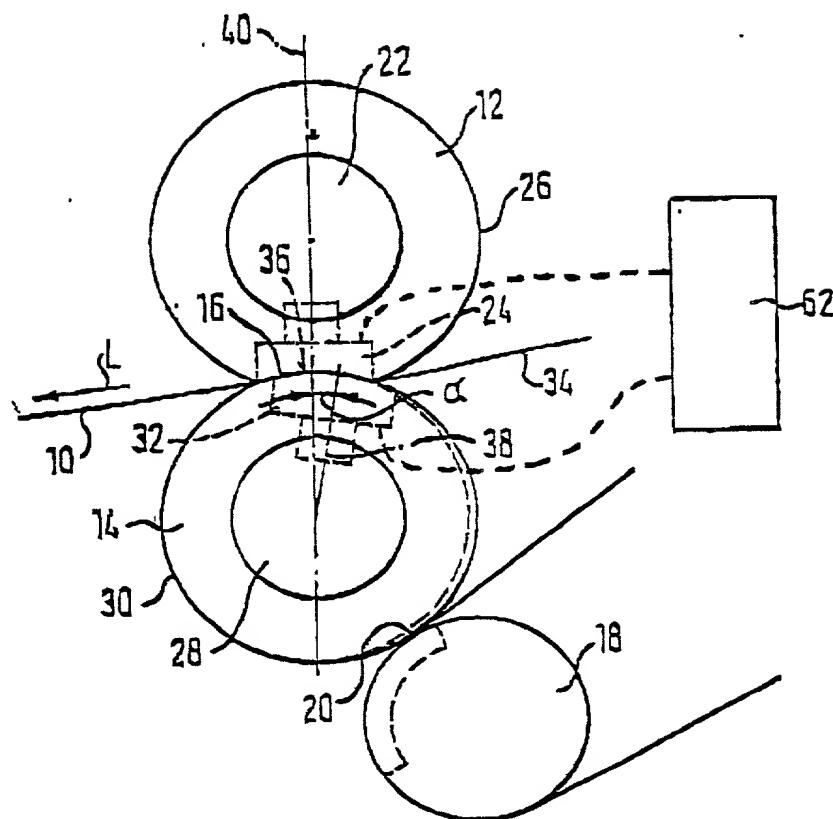


FIG. 2

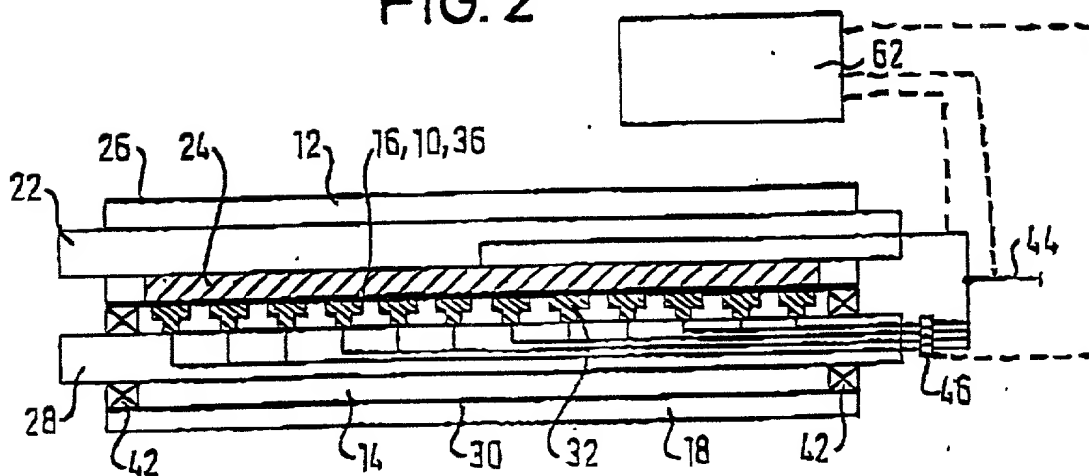

2/2

FIG. 3

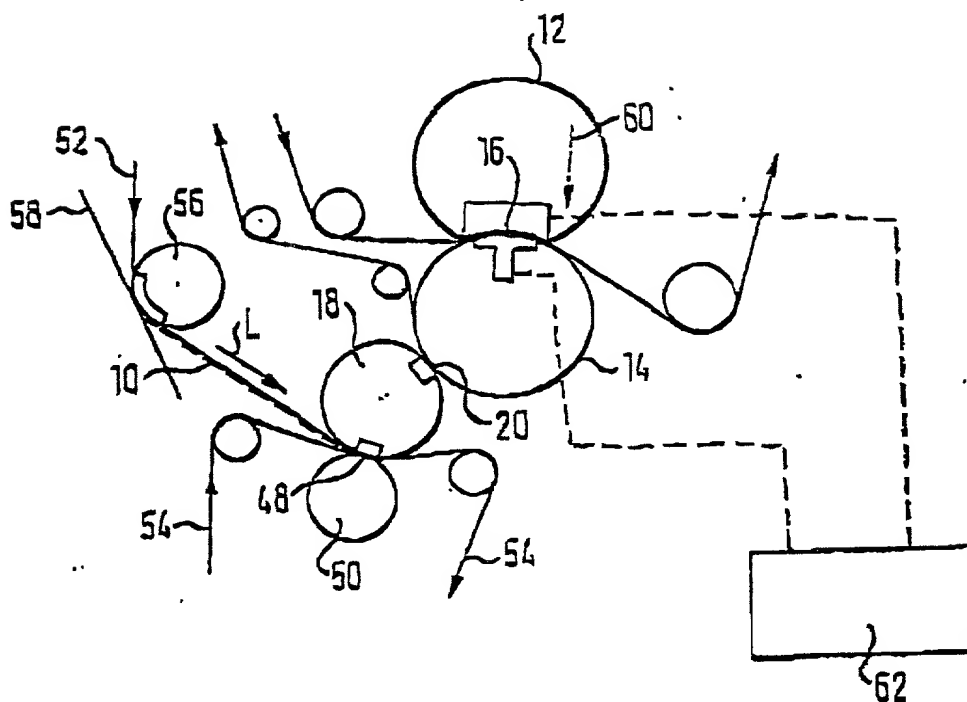

GREENBLUM &amp; BERNSTEIN

# Declaration and Power of Attorney For Patent Application

## Erklärung Für Patentanmeldungen Mit Vollmacht

### German Language Declaration

Als nachstehend benannter Erfinder erkläre ich hiermit an Eides Statt:

dass mein Wohnsitz, meine Postanschrift, und meine Staatsangehörigkeit den im Nachstehenden nach meinem Namen aufgeführten Angaben entsprechen,

dass ich, nach bestem Wissen der ursprüngliche, erste und alleinige Erfinder (falls nachstehend nur ein Name angegeben ist) oder ein ursprünglicher, erster und Miterfinder (falls nachstehend mehrere Namen aufgeführt sind) des Gegenstandes bin, für den dieser Antrag gestellt wird und für den ein Patent beantragt wird für die Erfindung mit dem Titel:

PRESSENANORDNUNG UND VERFAHREN  
ZUR BETREIBUNG DERSELBEN

deren Beschreibung

(zutreffendes ankreuzen)

☒ hier beigelegt ist.

☐ am \_\_\_\_\_ unter der

Anmeldungsseriennummer \_\_\_\_\_

eingereicht wurde und am \_\_\_\_\_  
abgeändert wurde (falls tatsächlich abgeändert).

Ich bestätige hiermit, dass ich den Inhalt der obigen Patentanmeldung einschliesslich der Ansprüche durchgesehen und verstanden habe, die eventuell durch einen Zusatzantrag wie oben erwähnt abgeändert wurde.

Ich erkenne meine Pflicht zur Offenbarung irgendwelcher Informationen, die für die Prüfung der vorliegenden Anmeldung in Einklang mit Absatz 37, Bundesgesetzbuch, Paragraph 1.56(a) von Wichtigkeit sind, an.

Ich beanspruche hiermit ausländische Prioritätsvorteile gemäss Abschnitt 35 der Zivilprozessordnung der Vereinigten Staaten, Paragraph 119 aller unten angegebenen Auslandsanmeldungen für ein Patent oder eine Erfindersurkunde, und habe auch alle Auslandsanmeldungen für ein Patent oder eine Erfindersurkunde nachstehend gekennzeichnet, die ein Anmeldedatum haben, das vor dem Anmeldedatum der Anmeldung liegt, für die Priorität beansprucht wird.

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

PRESS DEVICE AND METHOD OF USING  
THE SAME

the specification of which

(check one)

☒ is attached hereto.

☐ was filed on \_\_\_\_\_ as

Application Serial No. \_\_\_\_\_

and was amended on \_\_\_\_\_  
(if applicable)

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, §1.56(a).

I hereby claim foreign priority benefits under Title 35, United States Code, §119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

## German Language Declaration

Prior foreign applications  
Priorität beansprucht

Priority Claimed

19800807 4 GERMANY 12 January 1998  
(Number) (Country) (Day/Month/Year Filed)  
(Nummer) (Land) (Tag/Monat/Jahr eingereicht)

☒ ☐  
Yes No  
Ja Nein

(Number) (Country) (Day/Month/Year Filed)  
(Nummer) (Land) (Tag/Monat/Jahr eingereicht)

☐ ☐  
Yes No  
Ja Nein

(Number) (Country) (Day/Month/Year Filed)  
(Nummer) (Land) (Tag/Monat/Jahr eingereicht)

☐ ☐  
Yes No  
Ja Nein

Ich beanspruche hiermit gemäss Absatz 35 der Zivilprozessordnung der Vereinigten Staaten, Paragraph 120, den Vorzug aller unten aufgeführten Anmeldungen und falls der Gegenstand aus jedem Anspruch dieser Anmeldung nicht in einer früheren amerikanischen Patentanmeldung laut dem ersten Paragraphen des Absatzes 35 der Zivilprozessordnung der Vereinigten Staaten, Paragraph 112 offenbart ist, erkenne ich gemäss Absatz 97, Bundesgesetzbuch, Paragraph 1.56(a) meine Pflicht zur Offenbarung von Informationen an, die zwischen dem Anmeldedatum der früheren Anmeldung und dem nationalen oder PCT internationalen Anmeldedatum dieser Anmeldung bekannt geworden sind.

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, §1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

(Application Serial No.)  
(Anmeldeseriennummer)

(Filing Date)  
(Anmeldedatum)

(Status)  
patentiert, anhängig,  
aufgegeben)

(Status)  
(patented, pending,  
abandoned)

(Application Serial No.)  
(Anmeldeseriennummer)

(Filing Date)  
(Anmeldedatum)

(Status)  
patentiert, anhängig,  
aufgegeben)

(Status)  
(patented, pending,  
abandoned)

Ich erkläre hiermit, dass alle von mir in der vorliegenden Erklärung gemachten Angaben nach meinem besten Wissen und Gewissen der vollen Wahrheit entsprechen, und dass ich diese eidesstattliche Erklärung in Kenntnis dessen abgebe, dass wissentlich und vorsätzlich falsche Angaben gemäss Paragraph 1001, Absatz 18 der Zivilprozessordnung der Vereinigten Staaten von Amerika mit Geldstrafe belegt und/oder Gefängnis bestraft werden können, und dass derartig wissentlich und vorsätzlich falsche Angaben die Gültigkeit der vorliegenden Patentanmeldung oder eines darauf erteilten Patentes gefährden können.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Hiermit bevollmächtigt der Unterzeichnete den hierin genannten USA-Anwalt oder Stellvertreter, in der Abwesenheit einer direkten Verständigung zwischen den USA-Anwalt oder Stellvertreter und dem Unterzeichneten Anweisungen von seinem ausländischen Patentvertreter anzunehmen und auszuführen. Sollte sich das Personal ändern, von dem Anweisungen angenommen werden mögen, dann wird der hierin genannte USA-Anwalt oder Stellvertreter entsprechend von dem Unterzeichneten benachrichtigt.

The undersigned hereby authorizes the U.S. attorney or agent named herein to accept and follow instructions from his foreign patent agent as to any action to be taken in the Patent and Trademark Office regarding this application without direct communication between the U.S. attorney or agent and the undersigned. In the event of a change in the persons from whom instructions may be taken, the U.S. attorney or agent named herein will be so notified by the undersigned.



## German Language Declaration

**VERTRETUNGSVOLLMACHT:** Als benannter Erfinder beauftrage ich hiermit den nachstehend benannten Patentanwalt (oder die nachstehend benannten Patentanwälte) und/oder Patent-Agenten mit der Verfolgung der vorliegenden Patentanmeldung sowie mit der Abwicklung aller damit verbundenen Geschäfte vor dem Patent- und Warenzeichenamt: (Name und Registrationsnummer anführen)

**POWER OF ATTORNEY:** As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith. (list name and registration number)

Neil F. Greenblum  
Bruce H. Bernstein  
Roger P. Glass  
James L. Rowland  
Arnold Turk

Reg. No. 28,394  
Reg. No. 29,027  
Reg. No. 30,841  
Reg. No. 32,674  
Reg. No. 33,094

Telefongespräche bitte richten an:  
(Name und Telefonnummer)

Direct Telephone Calls to: (name and telephone number)

GREENBLUM & BERNSTEIN, P.L.C.  
(703) 716-1191

Postanschrift:

Send Correspondence to:

GREENBLUM & BERNSTEIN, P.L.C.  
1941 ROLAND CLARKE PLACE  
RESTON, VA 20191

Voller Name des einzigen oder ursprünglichen Erfinders:		Full name of sole or first inventor	
Hans PRINZING		Hans PRINZING	
Unterschrift des Erfinders	Datum	Inventor's signature	Date
<i>Hans Prinzling</i>	99-01-07	<i>Hans Prinzling</i>	99-01-07
Wohnsitz		Residence	
Heidenheim, DEUTSCHLAND		Heidenheim, GERMANY	
Staatsangehörigkeit		Citizenship	
DEUTSCHLAND		GERMANY	
Postanschrift		Post Office Address	
Hochbergweg 3 89518 - Heidenheim		Hochbergweg 3 89518 - Heidenheim	
DEUTSCHLAND		GERMANY	
Voller Name des zweiten Mitfinders (falls zutreffend)		Full name of second joint inventor, if any	
Rainer BENDELE		Rainer BENDELE	
Unterschrift des Erfinders	Datum	Second inventor's signature	Date
<i>Rainer Bendele</i>	99-01-07	<i>Rainer Bendele</i>	99-01-07
Wohnsitz		Residence	
Friedrichshafen, DEUTSCHLAND		Friedrichshafen, GERMANY	
Staatsangehörigkeit		Citizenship	
DEUTSCHLAND		GERMANY	
Postanschrift		Post Office Address	
Heimatstrasse 19 88046 - Friedrichshafen		Heimatstrasse 19 88046 - Friedrichshafen	
DEUTSCHLAND		GERMANY	

(Bitte entsprechende Informationen und Unterschriften im Falle von dritten und weiteren Mitfindern angeben).

(Supply similar information and signature for third and subsequent joint inventors.)